

KHC-5病房呼叫系统 KHC-5 Hospital call system

设备组成 Device Composition

序号 S/N	型号 Model	名称 Name	主要材质 Main material	重量 Weight	防护等级 IP class
1	KHC-5Q	病房呼叫控制器 Hospital call controller	阻燃ABS Fire retardant ABS	0.82Kg	IP 20
2	KHC-5G	病房呼叫控制器 Hospital call controller	碳钢 Carbon steel	3.34Kg	IP 44
3	KHC-5FQ	病房呼叫复示器 Hospital call reeater	阻燃ABS Fire retardant ABS	0.3Kg	IP 20
4	KHC-5HQ	病房呼叫器 Hospital call unit	阻燃ABS Fire retardant ABS	0.1Kg	IP 20
5	KHC-5JQ	病房呼叫报警器 Hospital call unit	阻燃ABS Fire retardant ABS	0.22Kg	IP 20
6	KHC-5JG	病房呼叫报警器 Hospital call unit	阻燃ABS Fire retardant ABS	0.44Kg	IP 44
7	KHC-5HC	病房/浴室呼叫器 Hospital bathroom call unit	阻燃ABS Fire retardant ABS	0.5Kg	IP 56

病房呼叫控制器Hospital call controller

功能描述

当呼叫器“呼叫”按钮被按下时，呼叫器指示灯都会被点亮。病房呼叫报警器会发出声光报警。

Function

When CALL button is pressed down, the indicator lights on the hospital call unit will become bright. Hospital call alarm unit will send out audible and visual alarm.

KHC-5Q病房呼叫控制器hospital call controller

工作电压 Operating voltage: DC24V $\begin{matrix} +30\% \\ -25\% \end{matrix}$

颜色 Color: 黑色 black (RAL 9005)

防护等级 IP class: IP20

重量 Weight: 0.82Kg

KHC-5G病房呼叫控制器hospital call controller

工作电压 Operating voltage: DC24V $\begin{matrix} +30\% \\ -25\% \end{matrix}$


颜色 Color: 中绿灰 Green gray (RAL 7035)

防护等级 IP class: IP44

重量 Weight: 3.34Kg


填料函进线孔径 Stuffing box cable entrance hole size:
8-φ14mm; 3-φ18mm

KHC-5FQ病房呼叫复示器Hospital call repeater

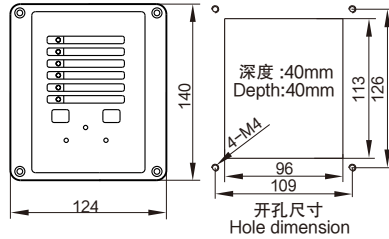


工作电压 Operating voltage:DC24V ^{+30%}_{-25%}
颜色 Color:黑色black (RAL 9005)
防护等级 IP class:IP20
重量 Weight:0.3Kg

KHC-5HQ病房呼叫器Hospital call unit




工作电源Power supply:DC24V ^{+30%}_{-25%}
颜色Color:白色white(RAL 1013)
防护等级 IP class:IP20
重量 Weight:0.1Kg
线长Cord length:1.5m

KHC-5JQ病房呼叫报警器Hospital call alarm unit

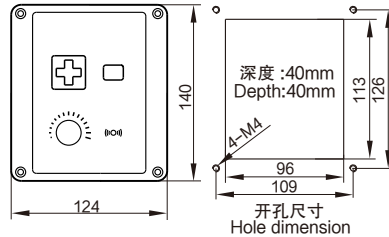


工作电源Power supply:DC24V ^{+30%}_{-25%}
报警声压级Alarm sound pressure level:75dB ~ 85dB
颜色Color:白色white (RAL 1013)
防护等级 IP class:IP20
重量 Weight:0.22Kg

KHC-5JG病房呼叫报警器Hospital call alarm unit

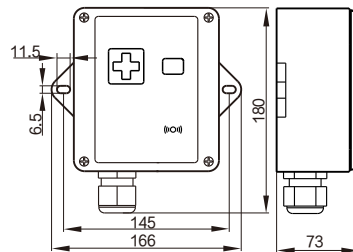

工作电源Power supply:DC24V ^{+30%}_{-25%}
报警声压级Alarm sound pressure level:75dB ~ 85dB
颜色Color:白色white (RAL 1013)
防护等级 IP class:IP44
重量 Weight:0.44Kg
填料函进线孔径 Stuffing box cable entrance hole size:
1-Φ 14mm

KHC-5HG病房/浴室呼叫器Hospital bathroom call unit

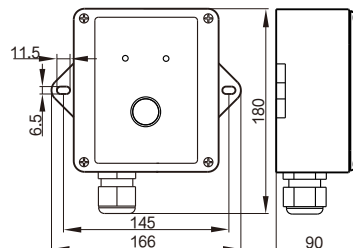

工作电源Power supply:DC24V ^{+30%}_{-25%}
颜色Color:白色white (RAL 1013)
防护等级 IP class:IP56
重量 Weight:0.5Kg
填料函进线孔径 Stuffing box cable entrance hole size:
1-Φ 14mm

KHC-5病房呼叫系统接线示意图 KHC-5 Hospital call system connection diagram

